

THYRISTOR MODULE

PK(PD,PE,KK)70F


UL:E76102(M)

Power Thyristor/Diode Module **PK70F** series are designed for various rectifier circuits and power controls. For your circuit application, following internal connections and wide voltage ratings up to 1,600V are available. High precision 25mm (1inch) width package and electrically isolated mounting base make your mechanical design easy.

- $I_{T(AV)}$ 70A, $I_{T(RMS)}$ 110A, I_{TSM} 1950A
- di/dt 150 A/ μ s
- dv/dt 500V/ μ s

(Applications)

Various rectifiers
AC/DC motor drives
Heater controls
Light dimmers
Static switches

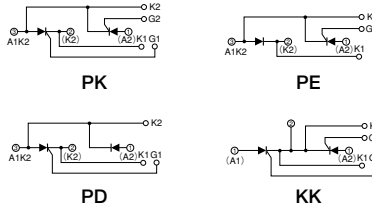

Unit : mm

Maximum Ratings

| Symbol | Item | Ratings | | | | Unit |
|-----------|---------------------------------------|--|--|--|--|------|
| | | PK70F40 PD70F40 PE70F40 KK70F40 | PK70F80 PD70F80 PE70F80 KK70F80 | PK70F120 PD70F120 PE70F120 KK70F120 | PK70F160 PD70F160 PE70F160 KK70F160 | |
| V_{RRM} | * Repetitive Peak Reverse Voltage | 400 | 800 | 1200 | 1600 | V |
| V_{RSM} | * Non-Repetitive Peak Reverse Voltage | 480 | 960 | 1300 | 1700 | V |
| V_{DRM} | Repetitive Peak Off-State Voltage | 400 | 800 | 1200 | 1600 | V |

| Symbol | Item | Conditions | Ratings | Unit | |
|--------------|---|--|-----------------------------------|------------------|-----------------|
| $I_{T(AV)}$ | * Average On-State Current | Single phase, half wave, 180° conduction, $T_c : 94^\circ\text{C}$ | 70 | A | |
| $I_{T(RMS)}$ | * R.M.S. On-State Current | Single phase, half wave, 180° conduction, $T_c : 94^\circ\text{C}$ | 110 | A | |
| I_{TSM} | * Surge On-State Current | 1/2 cycle, 50Hz/60Hz, peak Value, non-repetitive | 1800/1950 | A | |
| I^2t | * I^2t | Value for one cycle of surge current | 16200 | A ² S | |
| P_{GM} | Peak Gate Power Dissipation | | 10 | W | |
| $P_{G(AV)}$ | Average Gate Power Dissipation | | 3 | W | |
| I_{FGM} | Peak Gate Current | | 3 | A | |
| V_{FGM} | Peak Gate Voltage (Forward) | | 10 | V | |
| V_{RGM} | Peak Gate Voltage (Reverse) | | 5 | V | |
| di/dt | Critical Rate of Rise of On-State Current | $I_G=100\text{mA}$, $T_j=25^\circ\text{C}$, $V_D=1/2V_{DRM}$, $di_G/dt=0.1\text{A}/\mu\text{s}$ | 150 | A/ μ s | |
| V_{ISO} | * Isolation Breakdown Voltage (R.M.S.) | A.C. 1minute | 2500 | V | |
| T_j | * Operating Junction Temperature | | -40 to +125 | °C | |
| T_{stg} | * Storage Temperature | | -40 to +125 | °C | |
| | Mounting Torque | Mounting (M5) | Recommended Value 1.5-2.5 (15-25) | 2.7 (28) | N·m (kgf·cm) |
| | | Terminal (M5) | Recommended Value 1.5-2.5 (15-25) | 2.7 (28) | |
| | Mass | | | 170 | g |

Electrical Characteristics

| Symbol | Item | Conditions | Ratings | Unit |
|-----------------|--|---|---------|------------|
| I_{DRM} | Repetitive Peak Off-State Current, max. | at V_{DRM} , single phase, half wave, $T_j=125^\circ\text{C}$ | 15 | mA |
| I_{RRM} | * Repetitive Peak Reverse Current, max. | at V_{DRM} , single phase, half wave, $T_j=125^\circ\text{C}$ | 15 | mA |
| V_{TM} | * Peak On-State Voltage, max. | On-State Current 220A, $T_j=25^\circ\text{C}$ Inst. measurement | 1.40 | V |
| I_{GT}/V_{GT} | Gate Trigger Current/Voltage, max. | $T_j=25^\circ\text{C}$, $I_T=1\text{A}$, $V_D=6\text{V}$ | 70/3 | mA/V |
| V_{GD} | Non-Trigger Gate, Voltage. min. | $T_j=125^\circ\text{C}$, $V_D=1/2V_{DRM}$ | 0.25 | V |
| t_{gt} | Turn On Time, max. | $I_T=70\text{A}$, $I_G=100\text{mA}$, $T_j=25^\circ\text{C}$, $V_D=1/2V_{DRM}$, $di_G/dt=0.1\text{A}/\mu\text{s}$ | 10 | μ s |
| dv/dt | Critical Rate of Rise of Off-State Voltage, min. | $T_j=125^\circ\text{C}$, $V_D=2/3V_{DRM}$, Exponential wave. | 500 | V/ μ s |
| I_H | Holding Current, typ. | $T_j=25^\circ\text{C}$ | 50 | mA |
| I_L | Latching Current, typ. | $T_j=25^\circ\text{C}$ | 100 | mA |
| $R_{th(j-c)}$ | * Thermal Impedance, max. | Junction to case | 0.33 | °C/W |

* mark : Thyristor and Diode part. No mark : Thyristor part

